
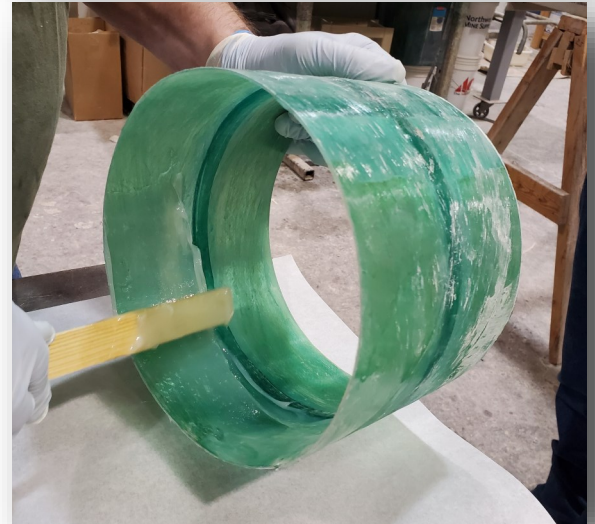


Product Information

Strand-Lock industrial couplings were developed to save labor on prep and install time, and exceed the toughest corrosion conditions. They are highly corrosion resistant and leak-tight under extreme hydrostatic pressures. Strand-Lock is available in sizes 3"Ø up to 24"Ø and have all been designed and tested to 5 PSI with a 5 to 1 safety factor. Our testing procedures include 3rd party certifications.

The coupling has an internal flange stop that keeps the seating surface centered when a duct is slid into each side. There are no metal or rubber parts that will fail over time in a corrosive environment. It is sealed internally with a 2-part epoxy that we provide which will be as permanent as the duct.

The couplings are an upcharge option, but our customer testimonials will tell the experience of a 50-75% labor savings, and a greatly reduced chance to leak as opposed to flanges or butt and wrap field joints. Little or no sanding or grinding is needed and most customers will dry fit the entire system and then go back and seal the joints. For existing buildings, clean rooms, or occupied space, we also have a VOC free epoxy as another upgrade option.

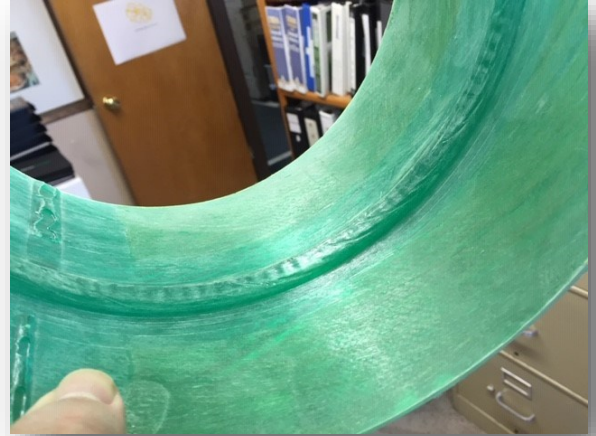

Spunstrand, Inc.
3731 N Ramsey Rd., Suite 105
Coeur d'Alene ID 83815
P. (208) 777-7444
www.spunstrand.com